



United States Department of the Interior

U.S. GEOLOGICAL SURVEY
Reston, Virginia 20192

REPORT OF CALIBRATION of Aerial Mapping Camera

January 30, 2007

Camera type: Wild RC30* **Camera serial no.:** 5046
Lens type: Universal Aviogon /4 **Lens serial no.:** 13086
Nominal focal Length: 153 mm **Maximum aperture:** f/4
Test aperture: f/4

Submitted by: Richard Crouse & Associates
Frederick, Maryland

Reference: Richard Crouse & Associates letter of authorization with purchase order No. 07-02, dated January 30, 2007.

These measurements were made on Agfa glass plates, 0.19 inch thick, with spectroscopic emulsion type APX Panchromatic, developed in D-19 at 68° F for 3 minutes with continuous agitation. These photographic plates were exposed on a multicollimator camera calibrator using a white light source rated at approximately 5200K.

I. Calibrated Focal Length: 152.930 mm

II. Lens Distortion

Field angle:	7.5°	15°	22.7°	30°	35°	40°
Symmetric radial (μm)	-2	-3	-2	1	3	1
Decentering tangential (μm)	0	0	0	0	1	1

<u>Symmetric radial distortion</u>		<u>Decentering distortion</u>		<u>Calibrated principal point</u>	
K_0	= 0.9941E-04	P_1	= -0.1494E-07	x_p	= 0.005 mm
K_1	= -0.2122E-07	P_2	= -0.5954E-07	y_p	= 0.002 mm
K_2	= 0.9037E-12	P_3	= 0.0000		
K_3	= 0.0000	P_4	= 0.0000		
K_4	= 0.0000				

The values and parameters for Calibrated Focal Length (CFL), Symmetric Radial Distortion (K_0, K_1, K_2, K_3, K_4), Decentering Distortion (P_1, P_2, P_3, P_4), and Calibrated Principal Point [point of symmetry] (x_p, y_p) were determined through a least-squares Simultaneous Multiframe Analytical Calibration (SMAC) adjustment. The x and y-coordinate measurements utilized in the adjustment of the above parameters have a standard deviation (σ) of ± 3 microns.

* Equipped with Forward Motion Compensation

III. Lens Resolving Power in cycles/mm

Area-weighted average resolution: 84

<u>Field angle:</u>	<u>0°</u>	<u>7.5°</u>	<u>15°</u>	<u>22.7°</u>	<u>30°</u>	<u>35°</u>	<u>40°</u>
Radial Lines	95	95	95	95	95	80	67
Tangential Lines	95	80	80	95	95	67	67

The resolving power is obtained by photographing a series of test bars and examining the resultant image with appropriate magnification to find the spatial frequency of the finest pattern in which the bars can be counted with reasonable confidence. The series of patterns has spatial frequencies from 5 to 268 cycles/mm in a geometric series having a ratio of the 4th root of 2. Radial lines are parallel to a radius from the center of the field, and tangential lines are perpendicular to a radius.

IV. Filter Parallelism

The two surfaces of the Wild 525 filter No. 7546 accompanying this camera are within 10 seconds of being parallel. This filter was used for the calibration.

V. Shutter Calibration

<u>Indicated Time</u> <u>(sec)</u>	<u>Rise Time</u> <u>(μ sec)</u>	<u>Fall Time</u> <u>(μ sec)</u>	<u>½ Width Time</u> <u>(ms)</u>	<u>Nom. Speed</u> <u>(sec)</u>	<u>Efficiency</u> <u>(%)</u>
1/125	1369	1363	8.55	1/130	90
1/250	670	666	4.34	1/250	90
1/500	360	343	2.21	1/500	90
1/1000	229	224	1.89	1/1060	87

The effective exposure times were determined with the lens at aperture f/4. The method is considered accurate within 3 percent. The technique used is described in International Standard ISO 516:1999(E).

VI. Film Platen

The platen mounted in Wild drive unit No. 5046-460 does not depart from a true plane by more than 13 μm (0.0005 in).


This camera is equipped with a platen identification marker that will register 460 in the data strip area for each exposure.

VII. Principal Point and Fiducial Mark Coordinates

d
a
t
a

s
t
r
i
p

s
i
d
e

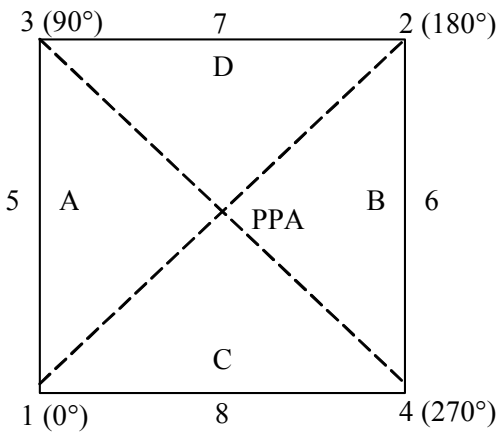

Positions of all points are referenced to the principal point of autocollimation (PPA) as origin. The diagram indicates the orientation of the reference points when the camera is viewed from the back, or a contact positive with the emulsion up. The data strip is to the left.

	<u>X coordinate (mm)</u>	<u>Y coordinate (mm)</u>
Indicated principal point, corner fiducials	.008	-.001
Indicated principal point, midside fiducials	.004	-.003
Principal point of autocollimation (PPA)	.000	.000
Calibrated principal point (point of symmetry)	.005	.002
<u>Fiducial Marks</u>		
1	-105.993	-106.003
2	106.009	106.001
3	-105.989	105.998
4	106.008	-106.003
5	-109.995	-.002
6	110.007	-.004
7	.005	110.005
8	.003	-110.001

VIII. Distances Between Fiducial marks

Corner fiducials (diagonals)	1-2: 299.818 mm	3-4: 299.812 mm
Lines joining these markers intersect at an angle o	89° 59' 57"	
Midside fiducials	5-6: 220.002 mm	7-8: 220.006 mm
Lines joining these markers intersect at an angle o	89° 59' 59"	
Corner fiducials (perimeter)	1-3: 212.001 mm	2-3: 211.998 mm
	1-4: 212.001 mm	2-4: 212.005 mm

The Method of measuring these distances is considered accurate within 0.003 mm

Note: For GPS applications, the nominal entrance pupil distance from the focal plane is 282 mm.


IX. Stereomodel Flatness

FMC Drive Unit No: 5046-460

Base/Height ratio: 0.6

Platen ID: 460

Maximum angle of field tested: 40°

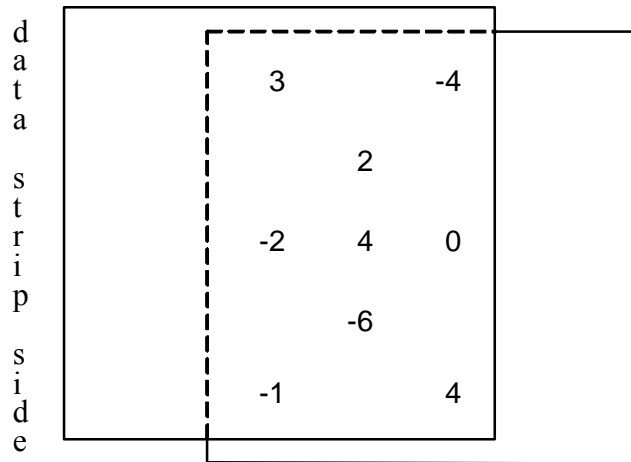

Stereomodel Test Point Array
(values in micrometers)

The values shown on the diagram are the average departures from flatness (at negative scale) for two computer-simulated stereo models. The values are based on comparator measurements on Kodak 4425 copy film made from Kodak 2405 film exposures. These measurements are considered accurate to within 5 µm.

X. System Resolving Power on film in cycles/mm

Area-weighted average resolution: 41

Film: Type 2405

Field angle:	0°	7.5°	15°	22.7°	30°	35°	40°
Radial Lines	48	48	48	40	48	48	40
Tangential Lines	48	40	40	40	40	34	34

This aerial mapping camera calibration report supersedes the previously issued USGS Report No. OSL/3010, dated February 9, 2004.

Gregory L. Stensaas
Remote Sensing Technologies Project Manager
Geography Discipline